



LUMINATORE®
LED-FLUTLICHT-STRAHLER
ASYMMETRIC



75 WATT (ABSTRAHLWINKEL 130° x 60°) // ARTIKELNR. 020.900 105

LUMINATORE®

OEM Lichtsystem

LUMINATORE® LED-FLUTLICHT-STRAHLER

ASYMMETRIC 75 WATT (ABSTRAHLWINKEL 130° x 60°) // ARTIKELNR. 020.900 105

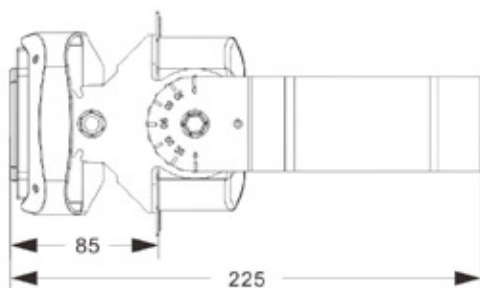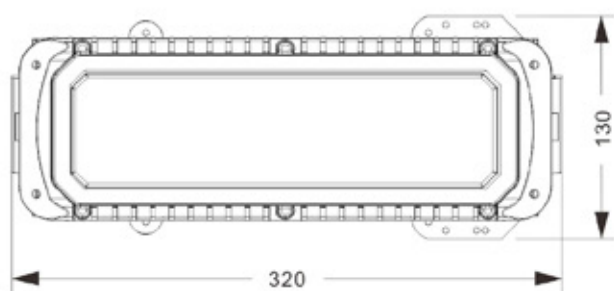

NETZTEIL:
Meanwell-ELG

LEISTUNGS-AUFNAHME:
75 Watt
(auch in anderen Leistungsstufen erhältlich)

INPUT:
100 - 240VAC 50/60Hz

LEISTUNGSFAKTOR:
>0.95

LICHTFARBE:
4000K
(auch in anderen Lichtfarben erhältlich)

LUMEN:
9525lm



MASSE:
320 x 130 x 225mm

GEWICHT:
3100g



- Druckguss Gehäuse aus Aluminium mit AkzoNobel Pulverbeschichtung
- Abstrahlwinkel 130° x 60°
- Lange Betriebslaufzeit von über 50.000 Stunden.
- wartungsarm
- CRI>80



LUMINATORE® LED-FLUTLICHT-STRAHLER

ASYMMETRIC 75 WATT (ABSTRAHLWINKEL 130° x 60°) // ARTIKELNR. 020.900 105

Model	MFL75W
Light Source	Osram/ Lumileds 5050
Luminous flux(lm)	9525
Beam Angle	130°x60°
Optical Cover	PC Lens

Input Voltage (V)	100-240VAC 50/60Hz	Housing	Die-casting Aluminum
LED Power (W)	68	Working Temperature (°C)	-20 to +50
System Power (W)	76	Working Humidity(RH%)	10-90
Power Factor	>0.95	Power Cable	3x1.0mm ² H05RN-F
System Efficiency (lm/W)	110-127	Net Weight (Kg)	3.2(Glass)/3.1(PC Lens)
Color Temperature (K)	3000/4000/5700	Dimension of Inner Box(mm)	385*205*350
CRI	>80	Dimension of Outer Carton(cm)	79*43.5*37 (4pcs/carton)
IP Class	IP65		

